







REV	DESCRIPTION	DATE	CHK	APP BY	APP DATE
A	ORIGINAL RELEASE	-	-	-	-

- NOTES:**
- ELECTRICAL REQUIREMENTS: 115 VAC, 60 Hz, SINGLE PHASE, 1Ø 20 AMP
 - CONSTRUCTION:
WORKSURFACE/WORKAREA: 16GA. 304 SS, #4 FINISH
ACCESS PANELS, BLOWER SECTION: 16 & 18GA. C.R.S. BAKED ENAMEL FINISH, BAKER PERMA WHITE
 - FILTER, MOTOR, BLOWER AND ALL ELECTRICAL COMPONENTS ARE FRONT ACCESSIBLE.
 - PETCOCKS RECOMMENDED FOR USE WITH NONFLAMMABLE GAS, AIR, OR VACUUM
AT 30 P.S.I. MAXIMUM OPERATING PRESSURE.
SHOULD NATURAL GAS BE USED, PLEASE ADVISE OF ANY SPECIAL PLUMBING REQUIRED BY YOUR LOCAL PLUMBING CODES; (ie BLACK IRON)
 - CABINET PLUMBING CONNECTORS ARE 3/8 PARKER FITTINGS. 3/8 NPT ADAPTER SHIPPED WITH CABINET.

EXHAUST REQUIREMENTS FOR SG303 WITH (HEC) HARD EXHAUST CONNECTION

SASH HEIGHT	EXHAUST FLOW RATE	PRESSURE LOSS
8"	162 CFM ±5	0.02" W.C.

NOTE: With optional Air tight damper add .10 to the above pressure loss.

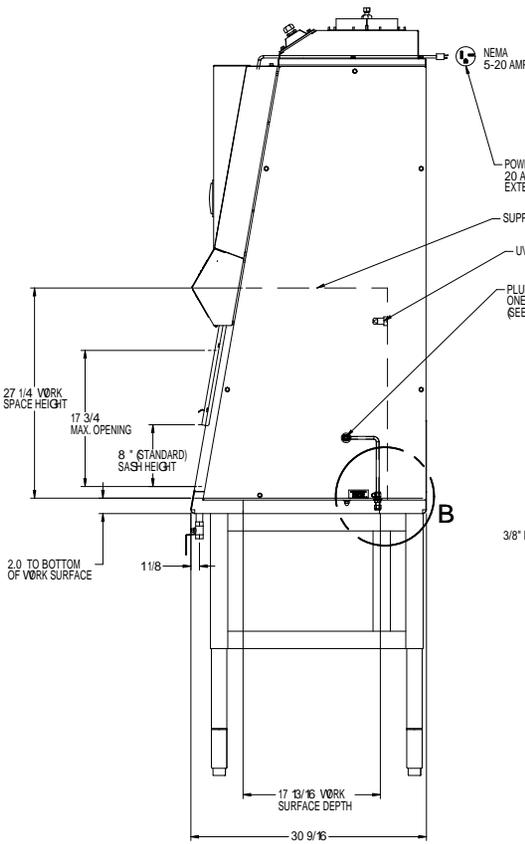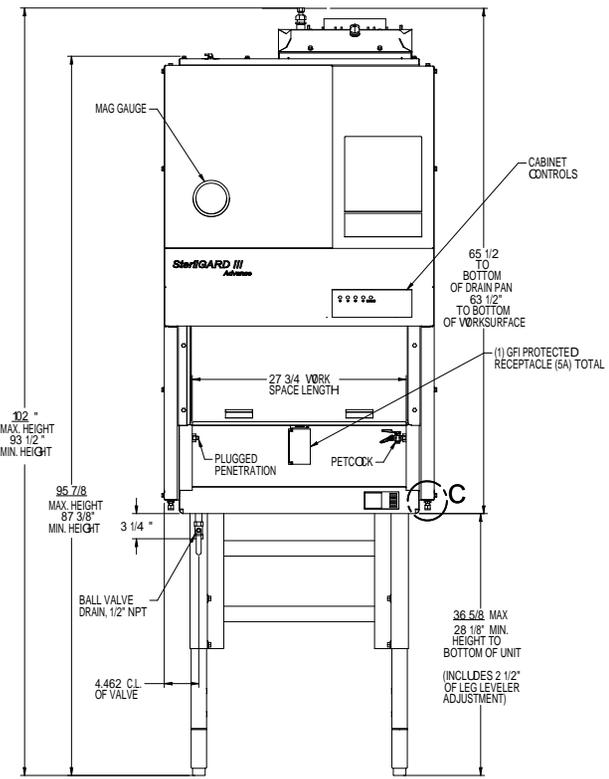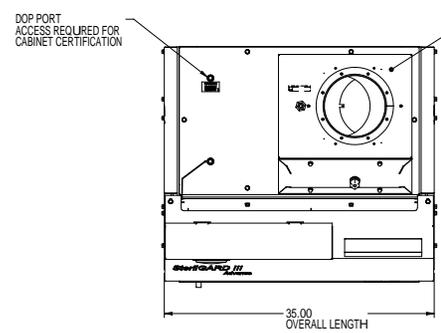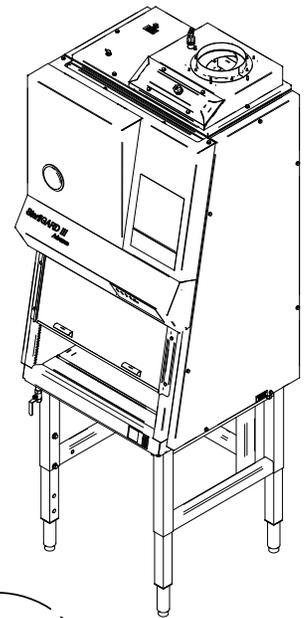

THE INFORMATION IN THIS DRAWING IS PROPRIETARY TO THE BAKER COMPANY INC. NO REPRODUCTION OR USE OF THE INFORMATION CONTAINED HEREIN MAY BE MADE WITHOUT EXPRESSED WRITTEN CONSENT OF THE BAKER COMPANY INC.

OPTION #S	OPTION DESCRIPTION
19	(HEC) HARD EXHAUST CONNECTION
10	UV LIGHT OPTION
1	CHANNEL STAND

THE BAKER COMPANY		STERILGUARD, MODEL SG303	
DATE	4/22/2003	DWG NO	BGA-SG303-A2-1-10-19
DESIGNER	AJohnson	REV	A
CHECKED	SCarpenter	DATE	4/22/2003
SCALE		1 OF 1	